

Stainless protector/Small type

KR-Q, SR-Q series

KR-Q series

SR-Q series



Industry's standard of transparent object detection sensor

- | Stable detection even at close distances
- | Visible red spot light
- | Narrow view design which makes detecting through gaps possible

Related products

Digital laser type

DR-Q
● P.396

Low cost type


Z3R-Q
● P.404

Selection table


Type	Shape	Sensing distance	Model (Models in parentheses are connector types)	
			NPN type	PNP type
Transparent object detection		 10 to 500 mm	KR-Q50NW (KR-Q50CNW)	KR-Q50PW (KR-Q50CPW)
		 0.01 to 1.5 m	KR-Q150NW (KR-Q150CNW)	KR-Q150PW (KR-Q150CPW)
		 0.01 to 2.5 m	KR-Q300NW (KR-Q300CNW)	KR-Q300PW (KR-Q300CPW)
		 10 to 500 mm	KR-Q50N (KR-Q50CN)	KR-Q50P (KR-Q50CP)
		 10 to 300 mm	SR-Q50NW (SR-Q50CNW)	SR-Q50PW (SR-Q50CPW)

● For the connector type, please purchase an optional JCN series connector cable.


Detection of plastic bottle passage

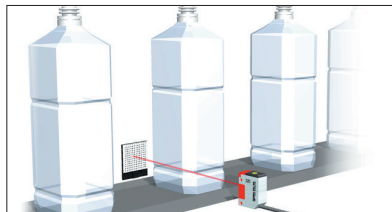

Detection from gaps in the guide

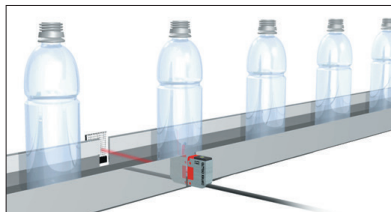


Counting of aligned plastic bottles

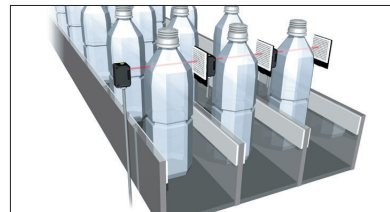

Stable detection even at close distances


Built-in QX circuit (KR-Q50NW)

Stable detection of transparent objects such as film or glass bottles close to the sensor. There is also a refracted light eliminate function to enhance detection of plastic bottles.

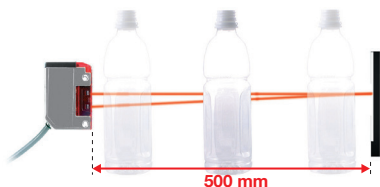

Narrow view design which makes detecting through gaps possible (KR-Q50N)

In addition to a long distance detection of 500 mm, transparent workpieces can also be reliably detected from small holes and gaps.



Surpasses the IEC standards

Built-in on-site noise countermeasure circuit (KR-Q series)


Noise level standards set by the International Electrotechnical Commission (IEC) have been cleared. Additionally, company standards (Feilen Test) further improve reliability against on-site noise.



Visible red spot light

High brightness spot light adopted


The red spot is always clear, without being influenced by the distance adjustment. The reflector shines in red when light axes match, greatly improving work efficiency.



Long range detection of 1 m or more is also possible

Sensing distance: Max. 2.5 m (KR-Q300NW)

A type with an exceptional sensing distance of 2.5 m is also available. Can be used efficiently without changing the step, etc., even when installed on large equipment.



For improved maintenance

Connector type also available

A connector type convenient for replacing sensors or just cables during maintenance is also available. Ideal for use in cleanrooms where the usage of items such as tools is undesirable.



Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors

Transparent Object Sensors

DR-Q

Z3R-Q, ZR-QX

KR-Q, SR-Q

Stable even in locations with small mounting space

Small type (SR-Q50NW)

Downsized even further than conventional sizes. Stands out in locations with a short sensing distance but small mounting space.



Options/Accessories

Reflector

Standard (included)



V-61
Sensing distance: As per specifications
60.9 x 50.9 mm

Small type



V-42
60% of sensing distance
42 x 35 mm

Vertical type



P45A
20% of sensing distance
54 x 12.4 mm

Protective mounting bracket

For KR-Q series



LK-501



LK-502

For SR-Q series



LS-501



LS-502

Connector cables

Straight



JCN-S
Cable length: 2 m
JCN-5S
Cable length: 5 m
JCN-10S
Cable length: 10 m

L-shaped



JCN-L
Cable length: 2 m
JCN-5L
Cable length: 5 m
JCN-10L
Cable length: 10 m

Specifications

Type		Retro-reflective type				
Model	NPN	Cable type	KR-Q50NW	KR-Q150NW	KR-Q300NW	KR-Q50N
		Connector type	KR-Q50CNW	KR-Q150CNW	KR-Q300CNW	KR-Q50CN
	PNP	Cable type	KR-Q50PW	KR-Q150PW	KR-Q300PW	KR-Q50P
		Connector type	KR-Q50CPW	KR-Q150CPW	KR-Q300CPW	KR-Q50CP
Sensing distance		10 to 500 mm*	0.01 to 1.5 m*	0.01 to 2.5 m*	10 to 500 mm*	
Light source		Red LED				
Smallest detectable object		ø40 mm			ø25 mm (steel bar)	
Response time		0.7 ms or less				
Distance adjustment		1-turn potentiometer				
Indicators		Light receiving indicator (red)				
Control output		NPN/PNP type open collector Max. 100 mA/30 VDC				
Output mode		Light ON / Dark ON switched by wiring				
Connection type		Cable type: Cable length: 2 m ø3.8 mm / Connector type: M8, 4-pin				
Insulation resistance		20 MΩ or more (with 500 VDC)				
Rating	Supply voltage	10 to 30 VDC, including 10% ripple (p-p)				
	Current consumption	30 mA or less				
Applicable regulations		EMC directive (2004/108/EC)				
Applicable standards		EN 60947-5-2				
Company standards		Noise resistance: Feilen Level 4 cleared				
Environmental resistance	Ambient temperature/humidity	-25 to +55°C (no freezing) / 35 to 85% RH (no condensation)				
	Ambient illuminance	Sunlight: 20,000 lx or less Incandescent lamp: 4,000 lx or less				
	Vibration resistance	10 to 55 Hz; double amplitude 1.5 mm; 2 hours in each of the X, Y, and Z directions				
	Shock resistance	Approx. 100 G (1000 m/s ²), 3 times in each of the X, Y, and Z directions				
	Degree of protection	IEC standard, IP67				
Material		Metal cover: SUS304 Housing: ABS Lens: Polycarbonate				
Weight without cable		Approx. 25 g				
Included accessories		Mounting bracket: BEF-W170 Reflector: V-61				

* When reflector V-61 is used

● Specifications are subject to change without prior notice for product improvement purposes.

Type		Retro-reflective type	
Model	NPN	Cable type	SR-Q50NW
		Connector type	SR-Q50CNW
	PNP	Cable type	SR-Q50PW
		Connector type	SR-Q50CPW
Sensing distance		10 to 300 mm*	
Light source		Red LED	
Smallest detectable object		ø40 mm	
Response time		0.5 ms or less	
Distance adjustment		1-turn potentiometer	
Indicators		Output indicator (orange)	
Control output		NPN/PNP type open collector Max. 100 mA/30 VDC	
Output mode		Light ON / Dark ON switched by wiring	
Connection type		Cable type: Cable length: 2 m ø3.5 mm / Connector type: M8, 4-pin	
Insulation resistance		20 MΩ or more (with 500 VDC)	
Rating	Supply voltage	10 to 30 VDC, including 10% ripple (p-p)	
	Current consumption	30 mA or less	
Applicable regulations		EMC directive (2004/108/EC)	
Applicable standards		EN 60947-5-2	
Company standards		Noise resistance: Feilen Level 3 cleared	
Environmental resistance	Ambient temperature/humidity	-25 to +55°C (no freezing) / 35 to 85% RH (no condensation)	
	Ambient illuminance	Sunlight: 10,000 lx or less Incandescent lamp: 3,000 lx or less	
	Vibration resistance	10 to 55 Hz; double amplitude 1.5 mm; 2 hours in each of the X, Y, and Z directions	
	Shock resistance	Approx. 100 G (1000 m/s ²), 3 times in each of the X, Y, and Z directions	
	Degree of protection	IEC standard, IP67	
Material		Housing: PSF + PBT (glass fiber filled)	
Weight without cable		Approx. 5 g	
Included accessories		Mounting bracket: BEF-W150-B Reflector: V-61	

* When reflector V-61 is used

● Specifications are subject to change without prior notice for product improvement purposes.

Photoelectric
Sensors

Specialized
Photoelectric
Sensors

Laser
Displacement
Sensors





Transparent
Object Sensors

DR-Q

Z3R-Q, ZR-QX

KR-Q, SR-Q


Distance adjustment

Retro-reflective type	Diagram	Potentiometer	Indicators	Adjustment procedure
			ON  (Red)  (Orange)	Gradually raise the sensitivity adjustment potentiometer from the MIN to MAX, and stop in the position where the indicator lights up. Place the workpiece in a fixed position and perform an operational check.


*When Dark ON is set by SR-Q, the indicator (orange) is inverted.

I/O circuit diagram

NPN output type

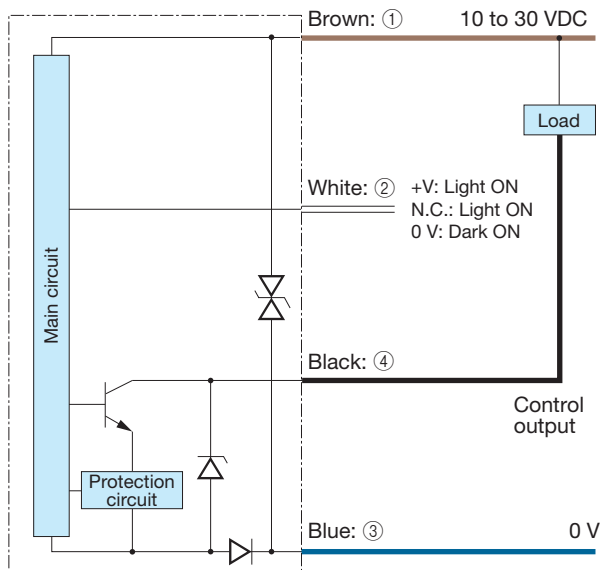

PNP output type

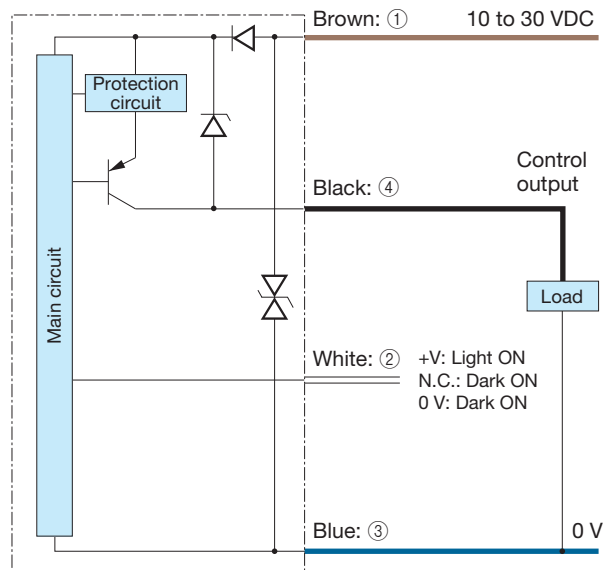

Connector type

(Pin configuration)


Sensor side Connector cable side



- ① 10 to 30 VDC
- ② +V: Light ON
N.C.: (NPN)Light ON
(PNP)Dark ON
0 V: Dark ON
- ③ 0 V
- ④ Control output

Notes

- When using a switching regulator for the power supply, be sure to ground the frame ground terminal.
- Avoid wiring in parallel with or in the same piping as high-voltage wires or power lines. Doing so may lead to malfunctions caused by noise. Also, shorten the power supply and signal wires as much as possible.
- Avoid using the transient state while the power is on (approx. 100 ms).
- The connector direction is fixed as the drawing below when you use L-shaped connector cable. Be aware that rotation is not possible.

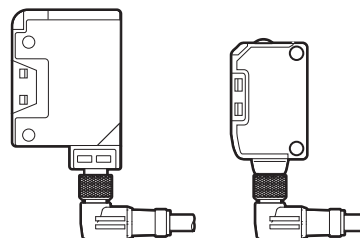

Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors

Transparent Object Sensors

DR-Q

Z3R-Q, ZR-QX


KR-Q, SR-Q

Dimensions


KR-Q series

(Unit: mm)

■ Cable type

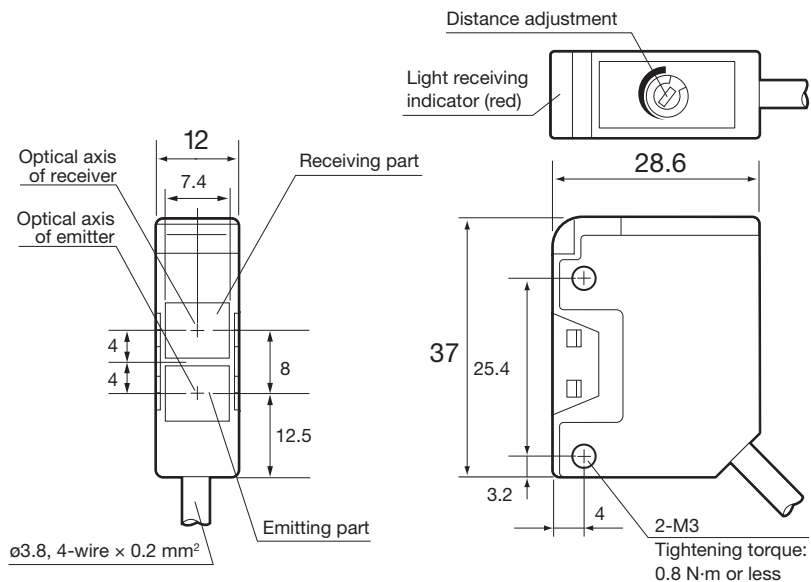

■ Connector type

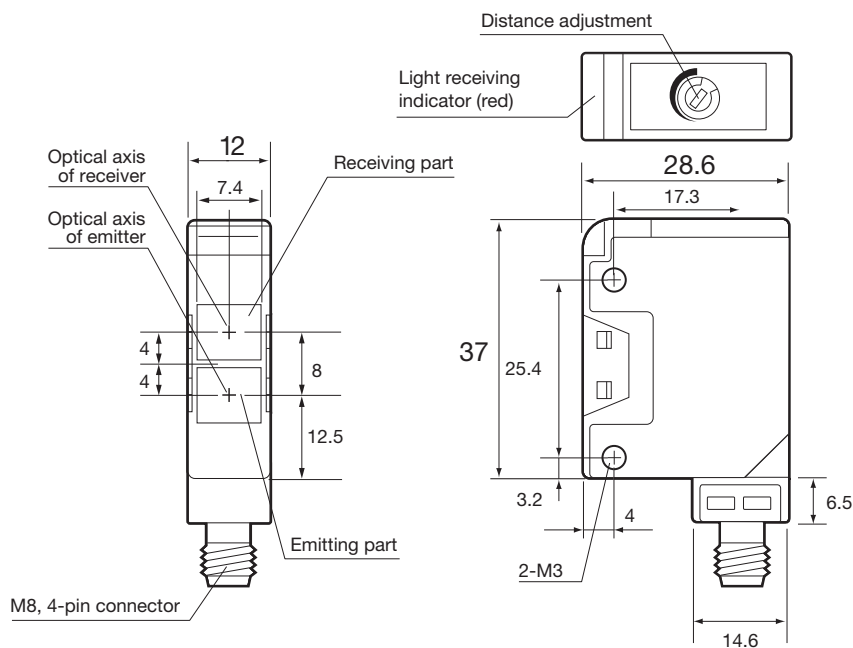

Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors

Transparent Object Sensors

DR-Q

Z3R-Q, ZR-QX



KR-Q, SR-Q

Dimensions



KR-Q with mounting bracket

■ Cable type

(Unit: mm)

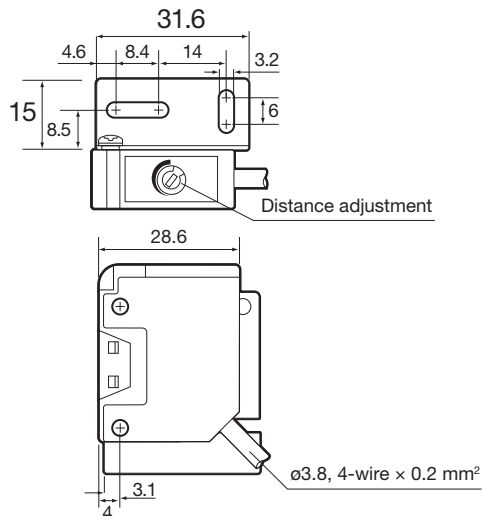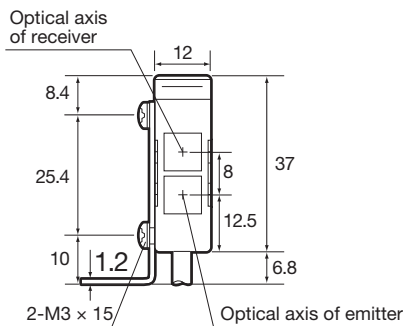


■ Connector type

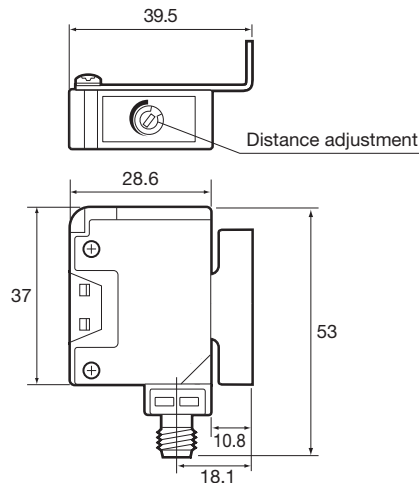

Mounting bracket (included)

■ BEF-W170

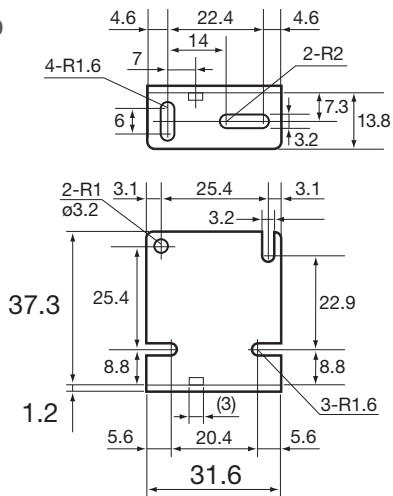

Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors

Transparent Object Sensors

DR-Q


Z3R-Q, ZR-QX

KR-Q, SR-Q


KR-Q series with protective mounting bracket

(Unit: mm)

■ LK-S01

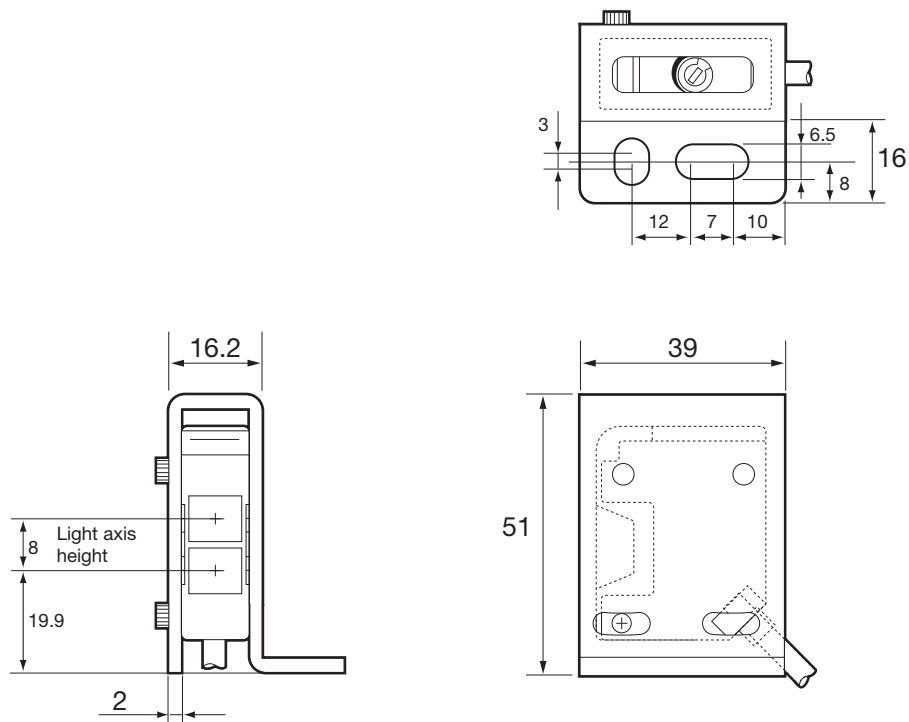

■ LK-S02

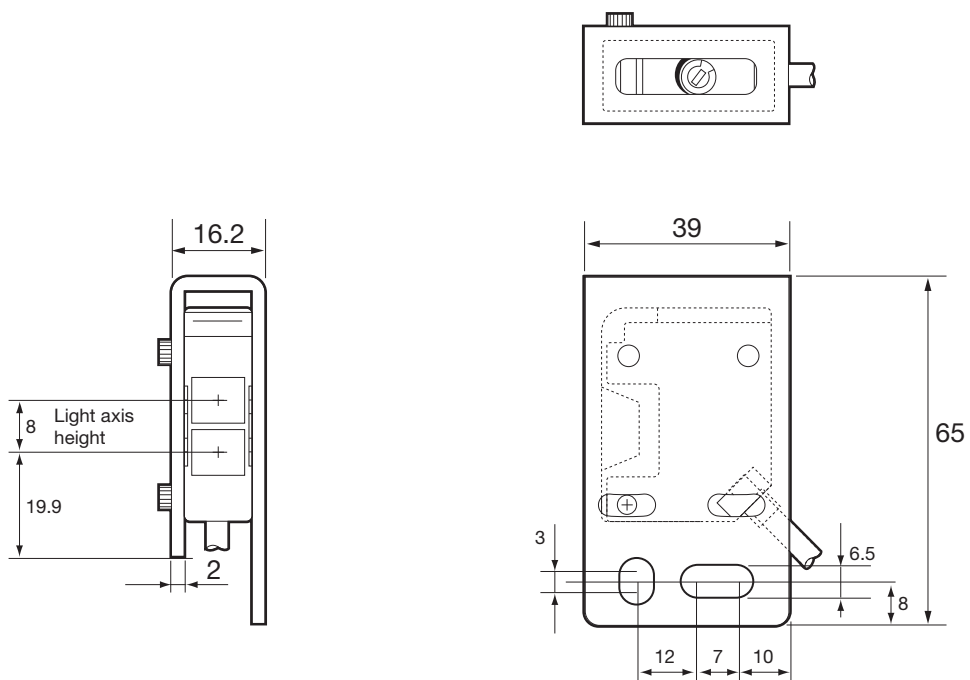

Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors

Transparent Object Sensors

DR-Q

Z3R-Q, ZR-QX


KR-Q, SR-Q

Dimensions


SR-Q series

■ Cable type

(Unit: mm)

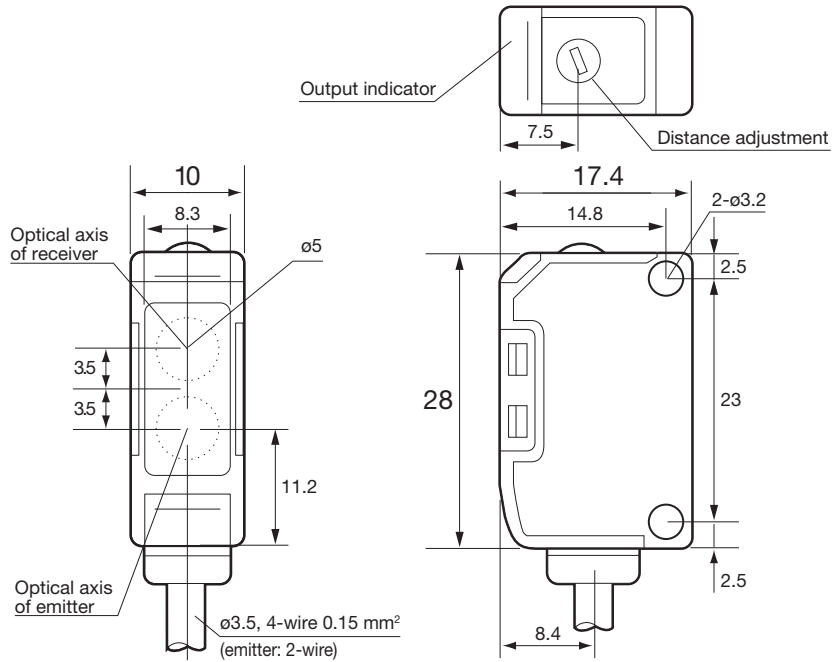

■ Connector type

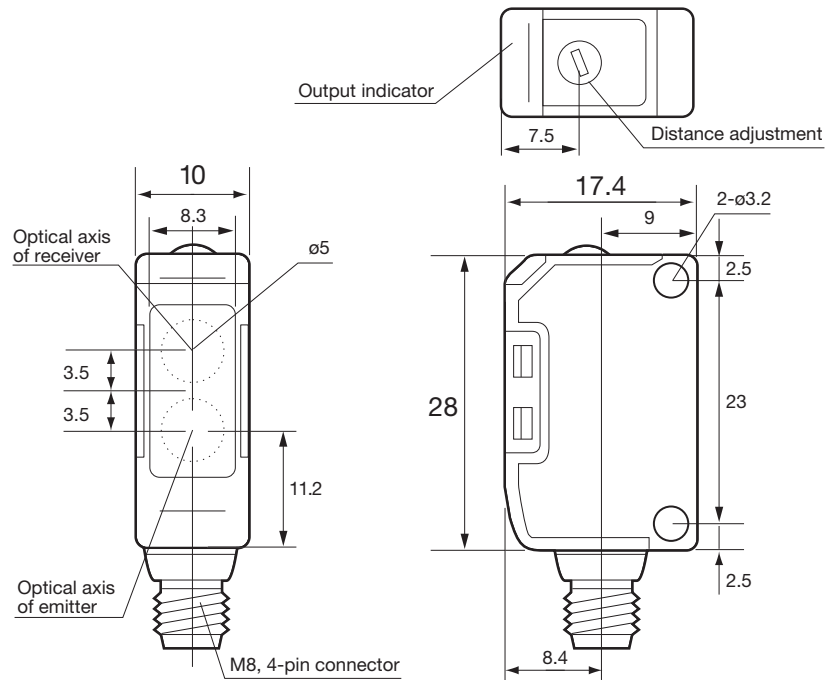

Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors

Transparent Object Sensors

DR-Q


Z3R-Q, ZR-QX

KR-Q, SR-Q


SR-Q series with mounting bracket

(Unit: mm)

■ Cable type (when using BEF-W150-B)

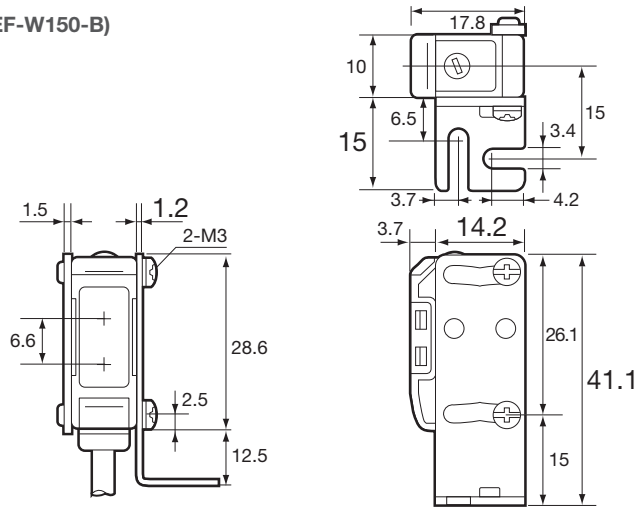


■ Connector type (when using BEF-W150-A)

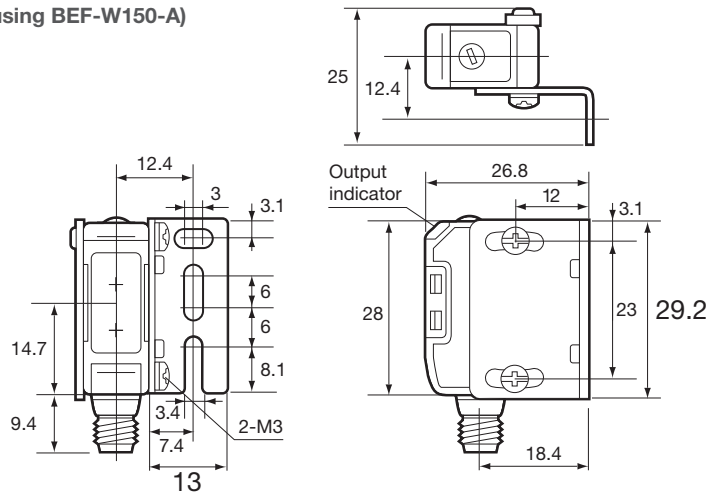


Mounting bracket (included)


■ BEF-W150-B (included with sensor)

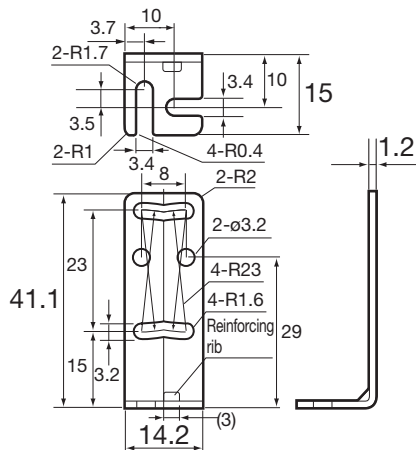

■ BEF-W150-A (optional)

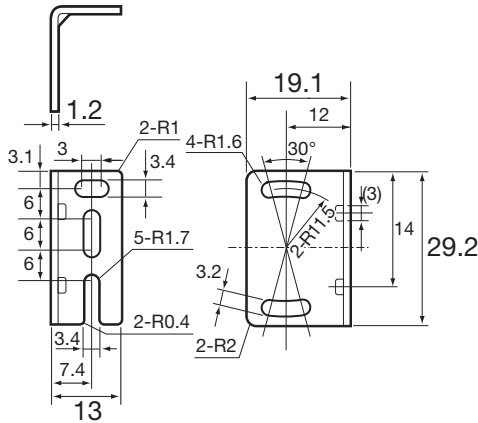

■ Nut plate (included)



Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors

Transparent Object Sensors

DR-Q

Z3R-Q, ZR-QX

KR-Q, SR-Q




Dimensions

SR-Q series with protective mounting bracket

(Unit: mm)




■ **LS-S01**

t = 2

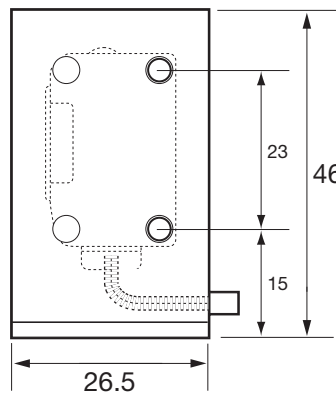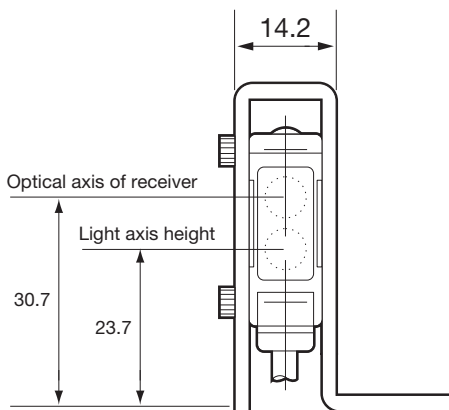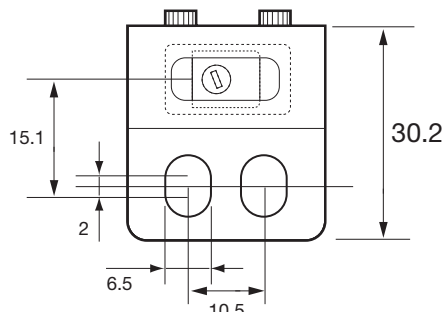

■ **LS-S02**

t = 2

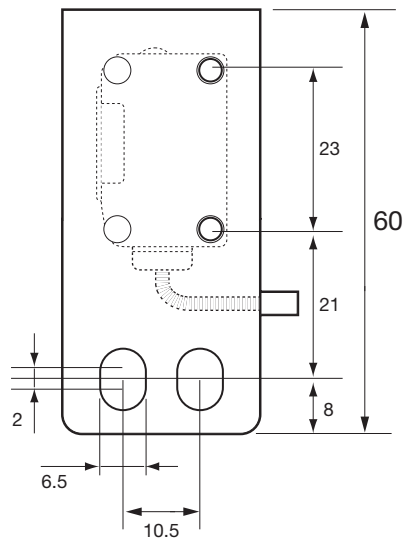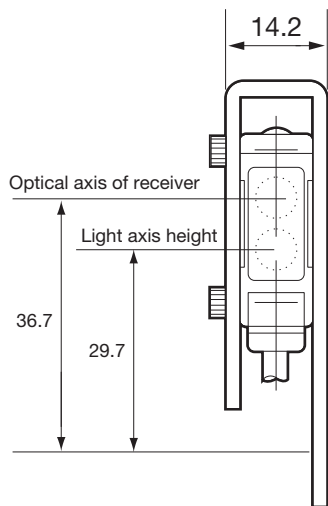

Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors

Transparent Object Sensors

DR-Q


Z3R-Q, ZR-QX

KR-Q, SR-Q


Connector cable (optional)

(Unit: mm)

■ JCN-S, JCN-5S, JCN-10S

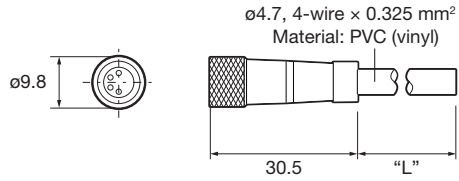

■ JCN-L, JCN-5L, JCN-10L






Reflector

■ V-61: Standard type reflector (included)

■ V-42: Small reflector (optional)

■ P45A: Vertical type reflector (optional)

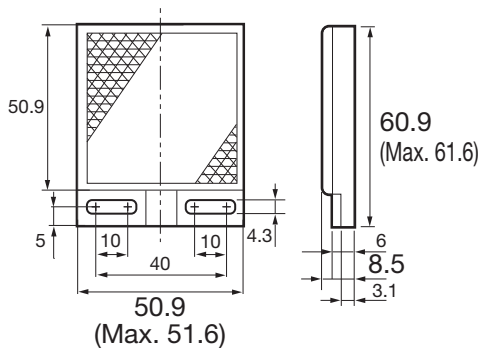

Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors

Transparent Object Sensors


DR-Q

Z3R-Q, ZR-QX


KR-Q, SR-Q

Typical characteristic data


KR-Q50□W

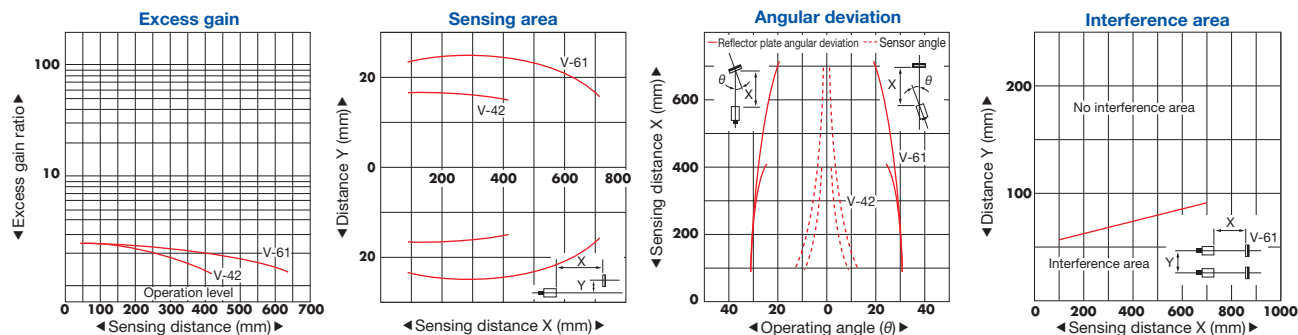


KR-Q150□W

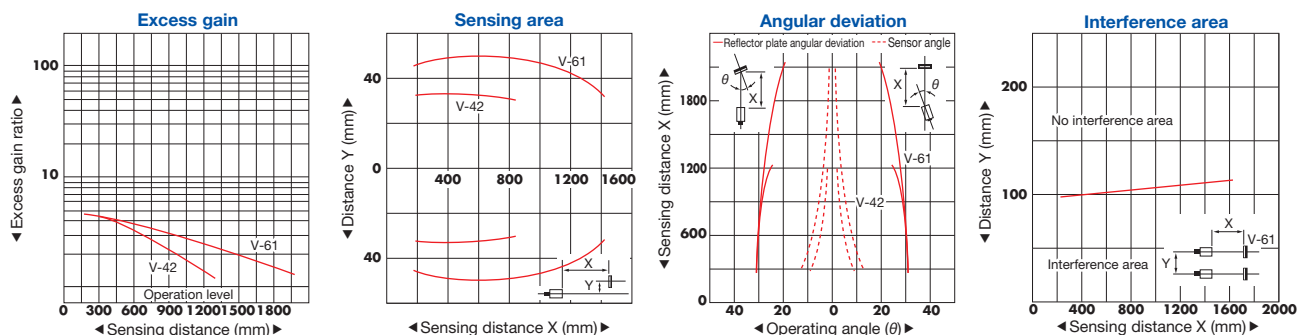

KR-Q300□W

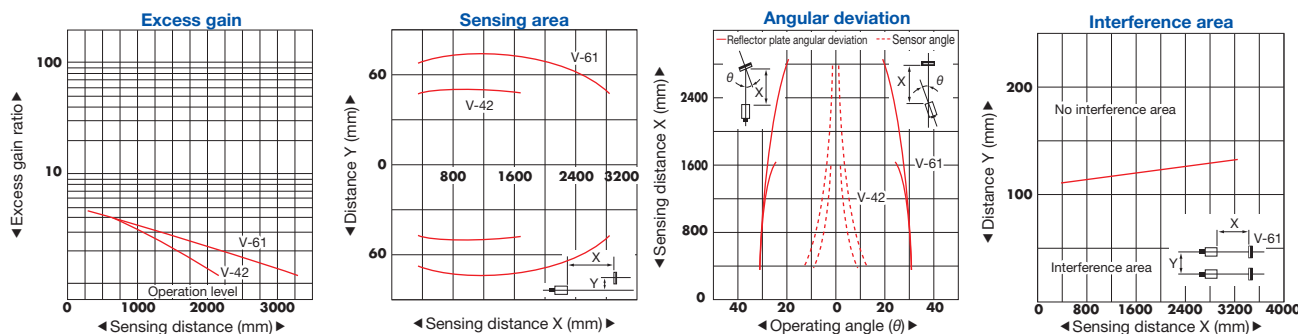

KR-Q50□

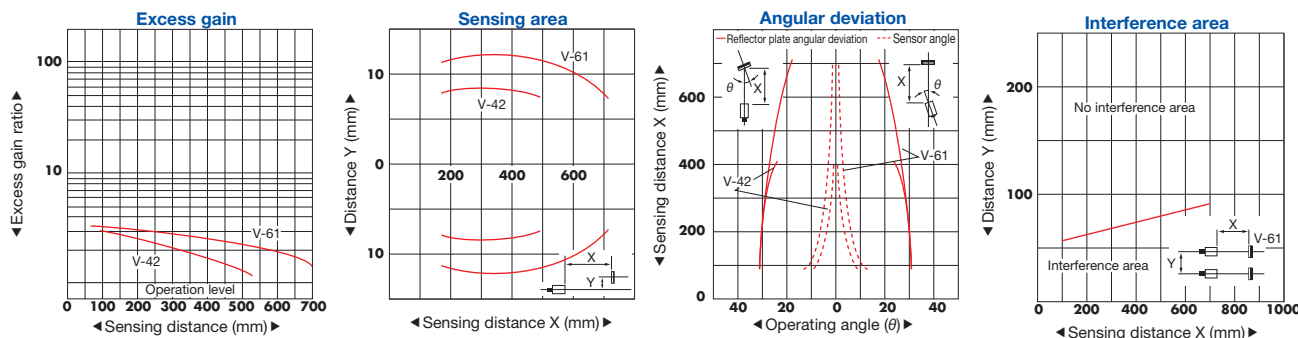

Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors





Transparent Object Sensors

DR-Q

Z3R-Q, ZR-QX

KR-Q, SR-Q

SR-Q50□W

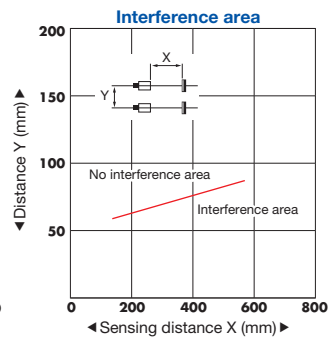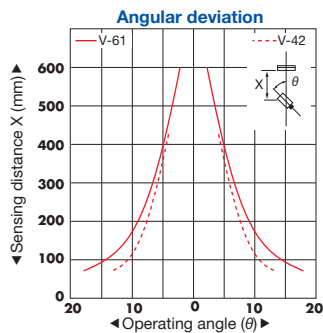

Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors

Transparent Object Sensors

DR-Q

Z3R-Q, ZR-QX

KR-Q, SR-Q